
An NEW generation ERH LED Ceiling Light / High Bay Light, Flat in IP65 with lightweight, high Power, lower cost, high efficiency, fast installation and Multi Functions of Dali / UGR/ EMERGENCY / MICROWAVE SENSOR will launch into our selling system.

Appearance:



Back bracket support

Surface mounting & Suspension/Hanging

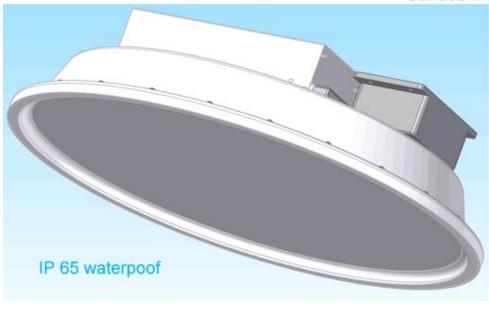


Waterproof LED Driver

Waterproof cable box: Support 5*1.5mm2 or 3*2.5mm2 square cable

Light Diffusor: Support UGR design



Wireframe: (Unit: mm)

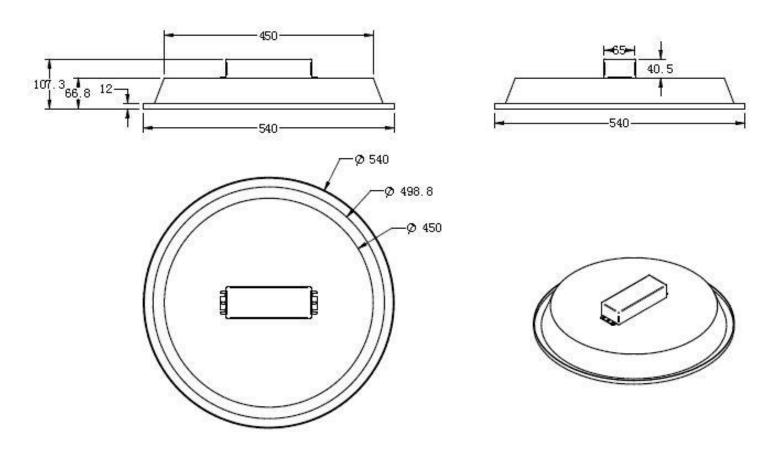


Suitable for application:

Warehouse, Surpermarket, Factory, Parking, Washroom


Product details:

- 1) From Optics summarized:
- Using Everlight and Edison 2835 for High efficiency output at least 130lm/W.
- When UGR Less than 25, will have the 8% reduction.
- Beam Angle: 110degree normal. 90degree with UGR.
- 2) From Structured summarized:
- Full aluminum in stamping. Thickness without spraying plastic: 1.5mm (in color of white).
- The diameter of the body: 550mm.
- -Temperature rising: the temperature raising of LED soldering pad are 30-35centigrade under 160 wattage operation power.
- IP65 dust/water proof .
- -Junctions box for Multi-input terminal.
- -weight: 4.5kgs
- 3) From Driver Summarized:
- Non-Isolated Driver in High efficiency **more than 95%**.
- High PF more than 98%.
- Multi-function of DALI /SWITCH dimming / microwave sensor / Emergency.
- Free-flicker
- Surge protection of 2KV or 4KV.

- 4) Installation type:
- 4.1 1 to 4 split out suspension cable

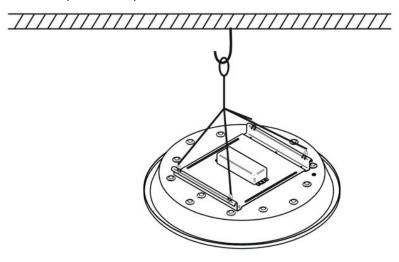

4.2 Ceiling mounted plated



ERH LED Ceiling Light / High Bay Light Pricing Scheme:

1) Standard edition

Size	OPTICS CHOOSE	Description	price/500 /PCS	diameter of the body/mm	Watt	Lumens@4000K/5000K	Eff/W	UGR<25
round high bay ,150W,IP65,normal	EVERIGHT 2835 R3 480PCS(80S6P)	round high bay , 150W,IP65,normal	Contact us	550mm	150	16000	106lm/w	nit
round high bay , 150w, <mark>High efficiency</mark>	EVERIGHT 2835 R3 480PCS(80S6P)	round high bay , 150w, <mark>High efficiency</mark>	Contact us	550mm	160	20000	123lm/w	nit

2) UGR edition

Size	OPTICS CHOOSE	Description	price/500 /PCS	diameter of the body/mm	Watt	Lumens@4000K/5000K	Eff/W	UGR<25
round high bay ,150W,IP65,normal with UGR <25	EVERIGHT 2835 R3 480PCS(80S6P)	round high bay ,150W,IP65,normal with UGR <25	Contact us	550mm	150	15000	100lm/w	<25
round high bay , 150w,High efficiency with UGR <25	EVERIGHT 2835 R3 480PCS(80S6P)	round high bay , 150w,High efficiency with UGR <25	Contact us	550mm	160	18000	113lm/w	<25

3) Additional installation accessories

Installation Type	USD per Piece	Photo
1 to 4 split out suspension cable	\$2.5	
Cailing mounted plated	r ₂	
Ceiling mounted plated	\$3	